Waves is part of the Calm Collection, a collaboration with 13&9 and Fractals Research.


Inspired by the dynamic patterns of rippling water, Calm-Waves creates a visual landscape that helps reduce stress through natural fractal patterns. The design is built from a small line that is repeated, re-scaled, and rearranged with scientific precision. The resulting surface prompts the same eye movements as the quiet glimmer of a watery surface. Research shows that perceiving natural fractal patterns activates a stressrelief response in our bodies. By tapping into that natural response, Calm-Waves supports a sense of calmness and concentration in your spaces.

Installation types:

Drop the tiles into any 9/16" or 15/16" teegrid.

Concealed tile install - tiles fit neatly together edge-to-edge, to conceal the actual grid.

This product is also available with an optional cap tile to completely enclose the product when required. When using the cap, you have the option of a flat or tegular tile as well as using a bolt-slot grid.

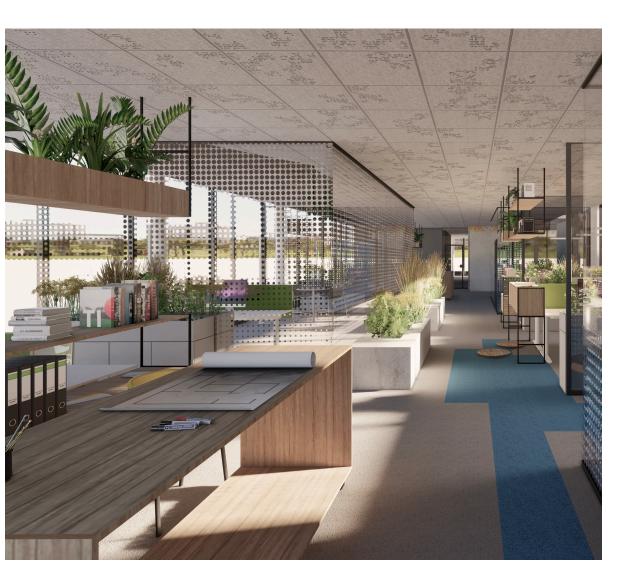



	9mm Polyester (PET) Felt +/- 0.35"
ĒD	Size $23.75"$ (I) $\times 23.75"$ (w) $\times +/35"$ (d) Also available with a 9mm back panel to create a solid tile when required.
Ō	Weight 1.5 lb / 3.04 lb with cap
Ś	Warranty 3-Year
	Flammability ASTM E84 Class A Certified / CAN/ULC-S102.2
Ø	Environmental Polyester (PET) felt 60% pre-consumer recycled
	Color Choose from one of our standard colors shown below. See page 4 for additional colors that can be added as accents to your design.
	F:02 F:03 F:04 F:05

Slight variations in color should be expected when using this material. We suggest that you request a material sample to verify felt colors.

াি Acoustics

Material

Closed plenum installation

• Test Method - ASTM E795-16 Type E-400 Mounting closed tile - NRC .85

Testing results available upon request at sales@fact.design





Lead Time

Ships in four (4) weeks

Application

Pattern Directional

Commercial/Office, Education, Hospitality, Retail

Sm

Installation / Maintenance

Each pattern repeats every 8 tiles. Insert the finished tiles into the tee grid in unlimited orientation and configuration.

To remove dust or air-born particulate matter, simply vacuum the tiles or use compressed air. For deeper cleaning of stains, use a clean cloth or sponge with a non-solvent base solution of carpet shampoo always making sure to follow the manufacturer's instructions. Starting from the outside of the stain work in a circular motion towards the center which should avoid spreading the stain. Afterwards, use a clean sponge or cloth with clean warm water to remove excess moisture. Allow to dry, then brush the area gently with a soft brush if needed.

The treatments listed above are intended as general guidance only. FACT design takes no responsibility for any damage that may occur from the execution of the treatment listed above.

	002-00-000-000-000-000-000-000-000-000-	800°0000000000000000000000000000000000	9000 ""





camira Blazer - Catagory A

Min. Requirements: Ceilings - 160 sq. ft. per color Walls - 40 sq. ft. per color

If your project requires less, please reach out to your local rep to discuss the project.

camira Blazer Lite - Catagory A

Min. Requirements: Ceilings - 160 sq. ft. per color Walls - 40 sq. ft. per color

If your project requires less, please reach out to your local rep to discuss the project.

kvadrat Divina 3 - Catagory B

Min. Requirements: Ceilings - 320 sq. ft. per color Walls - 40 sq. ft. per color

If your project requires less, please reach out to your local rep to discuss the project.

kvadrat Divina Melange 3 - Catagory B

Min. Requirements: Ceilings - 320 sq. ft. per color Walls - 40 sq. ft. per color

If your project requires less, please reach out to your local rep to discuss the project.

kvadrat Divina MD - Catagory B

Min. Requirements: Ceilings – 320 sq. ft. per color Walls – 40 sq. ft. per color

If your project requires less, please reach out to your local rep to discuss the project.



metro faux felt - Category A

Min. Requirements: Ceilings - none Walls - none

